



TCD 72

CONVEYOR / DRYER

The Secap TCD 72 Vacuum Assist Conveyor and Dryer System improves the drying process by adding heat and additional time for curing ink. The addition of the TCD 72 to a printing environment expands the capability and versatility of printing on materials such as glossy and aqueous overcoated media.



PRINTERS



TABBERS



FOLDERS AND
INSERTERS



SOFTWARE

TECHNICAL SPECIFICATIONS

Conveyor

Speed:
Adjustable speed from 67 to 350fpm
Up to 36,000 #10 envelopes/hr.

Drop Tray:
Adjustable from 5.2" to 11.2"
(transport belt to stacking surface)

Physical Characteristics:
Dimensions: 14"W x 69"L x 32-39"H
Weight: 167 lbs.
Power: 120 V.A.C. 50/60 Hz.

Motor:
1/3 HP thermally protected 90 volt

Certification:
TUV, CE

Dryer


Watts: 2000

Fans:
2-170 cfm fans

Physical Characteristics:
Dimensions: 5.7"W x 40.36"L x 5"H
Power:
Amp: 15
Voltage: 120 VAC

Certification:
TUV, CE

Specifications subject to change without notice.

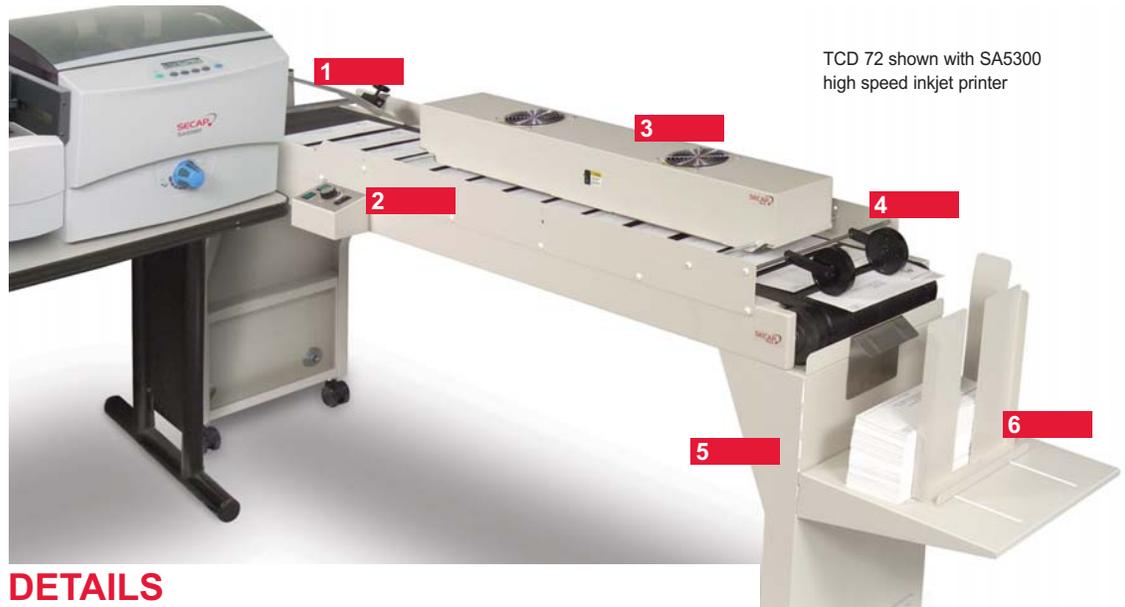

TCD 72 shown with SA5300 high speed inkjet printer

DETAILS

The TCD 72 features an integrated high-output vacuum conveyor system with a 2000 watt dryer for enhancing the inkjet drying process.

1. Wide Format Perforated Belt

The TCD 6' conveyor has a wide perforated anti-static belt designed for optimum control stabilizing the material after exiting the printer for smooth delivery to the drop stacking tray.

2. Control Panel

Variable speed dial controls the belt speed.

3. 2000 Watt Dryer

Four heat lamps and two fans improve the drying process. The drying area of 5.5" W x 40" L allows additional time for curing ink. The dual stage vacuum assist system enhances the inkjet drying process allowing you to print on glossy and overcoated media.

4. Material Control Guides

Material control stop and guides direct the material on the conveyor and down into the drop stacker.

5. Adjustable Stand

The conveyor is mounted on an adjustable stand allowing for easy alignment and setup with your equipment. The conveyor/dryer stand shown above is adjacent to the SA5300 desktop printer. The stand has locking casters to secure the product in place.

6. Drop Stacking Tray

The adjustable drop stacking tray accommodates material ranging from 3" x 5" cards up to 10" x 13" material.



The TCD 72 is an ideal solution for customers printing on glossy and coated stock. It improves the drying speed of HP Versatile Black and assists in the drying of Secap Picaso™ ink printed on aqueous overcoated media.

Ask about Secap's complete line of mailstream solutions:



PRINTERS



TABBERS



FOLDERS AND INSERTERS



SOFTWARE

Available from your authorized and certified Secap dealer.

P: (701) 451-0663
F: (701) 235-2720

4141 38th Street SW
P.O. Box 9514
Fargo, ND 58104

www.dakotamailing.com

Dakota Mailing & Shipping Equipment, Inc.

SECAP
Mailstream Management and Solutions...

10 Clipper Road
West Conshohocken, PA
19428-2721
800.523.0320
610.825.6205
610.825.1397 (fax)
www.secap.com

Contact the dealer above or call 800.523.0320 for a Secap dealer near you.